


HOTCOTE® HARDWARE For Electrifiable Coated Wire



PRODUCT NAME JWI CODE

- A. Donut Tensioner*** JWDT
The quickest tighteners available - no stripping or crimping needed. This no saw tooth design is safer for horses and riders. Comes with 2 Stainless Steel Locking Pins.
- B. Joining Buckle*** JWCWJB
A quick, secure method to join coated wires without stripping or crimping.
- C. Straight Attaching Insulated Buckle*** JWLCAB
With HDG washer. Use for electrifiable fence on square posts or buildings.
- D. Pre-Bent 45° Attaching Insulated Buckle*** . . . JWLCAB-45
With HDG washer. Assists in alignment with line posts and reduces possible post rotation. 45° PROVIDES CORRECT MOUNTING POSITION (electrifiable fence – end and gate posts).
- E. Inside Corner Insulator with Hex Head**** JWIC
Made of heavy duty materials for a long lasting, professional installed look! For up to 90° on an inside corner. SIZE: .4375" x 4" (10mm x 109mm)
- F. Lag Screw**** LAG-4
SIZE: .5" x 4" (12mm x 109mm)
- G. Hotcote® Insulator*** JWIHCIW

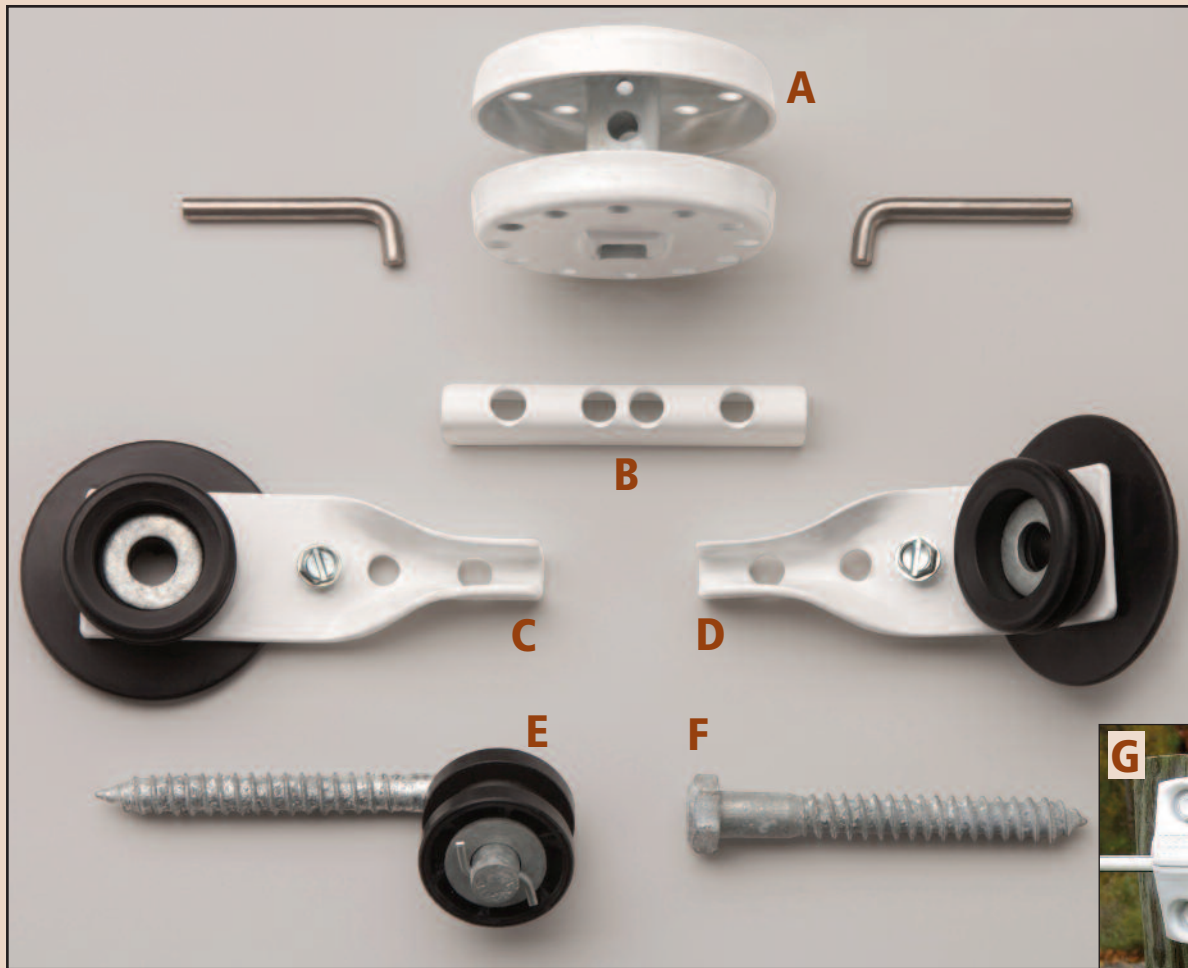

This is a world class design innovation for permanent installations of electrifiable coated wire. It doesn't break like others, it's extremely strong, you could say it's solid, we believe it's at the top of the list for design, function and uniqueness!

For More Details, Tips & Techniques on Building Fences,
Please visit our website:
www.horserail.com

Options for Installing the Donut Tensioner



Extended Handle Ratchets
Used for a "One-Man" Installation Process

- Use 2" (51mm) size for Donut Tensioners
- Includes safety pin



Long Handle Ratchets
Used for a "Two-Man" Installation Process

- Comes in 18" (457mm) and 24" (610mm) lengths
- Two ratchets required

* Hot Dipped Galvanized + Powder Coated (Double Coated for superior weather resistance). Available in White, Black and Brown.
** Hot Dipped Galvanized.

