
HOTCOTE[®] HARDWARE For Electrifiable Coated Wire

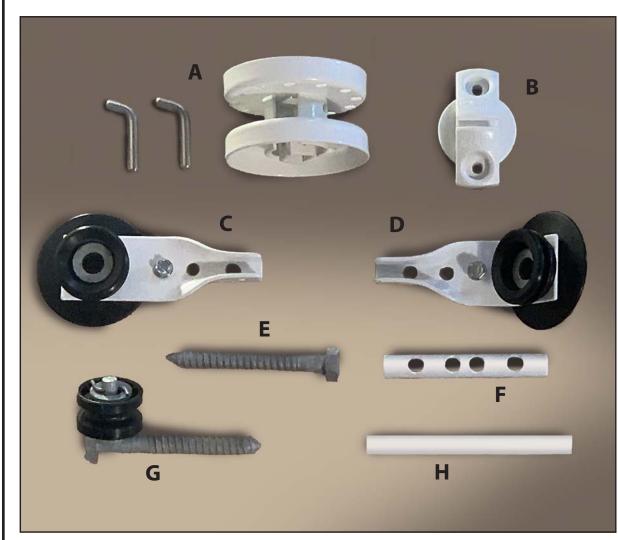

* Hotcote[®] Hardware is **Double Coated** for Superior Weather Resistance: *E-Coat and Powder Coat*

Please visit horserail.com for a complete list of trademark and patent information.

Horserail®, Hottop®, Hottop Plus®, Horsecote®, Hotcote®, and Safe-T-Brace Cable® are registered U.S. trademarks of John Wall, Inc

Avaialble in Brown, Black and White

** Hot Dipped Galvanized

Copyright © 2021 John Wall, Inc. All Rights Reserved.





Extended Handle Ratchets Use 2[~] (51mm) size for Mini Spooler Tensioners • Includes safety pin

PRODUCT NAME JWI CODE

- A. Two Piece Mini Spooler Tensioner*...... JWSPBK-2MS The quickest tighteners available - no stripping or crimping needed. This no saw tooth design is safer for horses and riders. Comes with 2 Stainless Steel Locking Pins.
- **C. Straight Attaching Insulated Buckle*** JWLCAB With HDG washer. Use for electrifiable fence on square posts or buildings.
- D. Pre-Bent 45° Attaching Insulated Buckle* JWLCAB-45 With HDG washer. Assists in alignment with line posts and reduces possible post rotation. 45° PROVIDES CORRECT MOUNTING POSITION (electricfiable fence – end and gate posts).
- E. Lag Screw** LAG-4 SIZE: .5" x 4" (12mm x 100mm)

100 'Hotcote® Tubing Insulator (Roll)...... JWHT-4610 For outside corner installations. (*Not shown in photo*) Available in brown, black and white.

