


HORSECOTE® HARDWARE For Non-Conductive Coated Wire

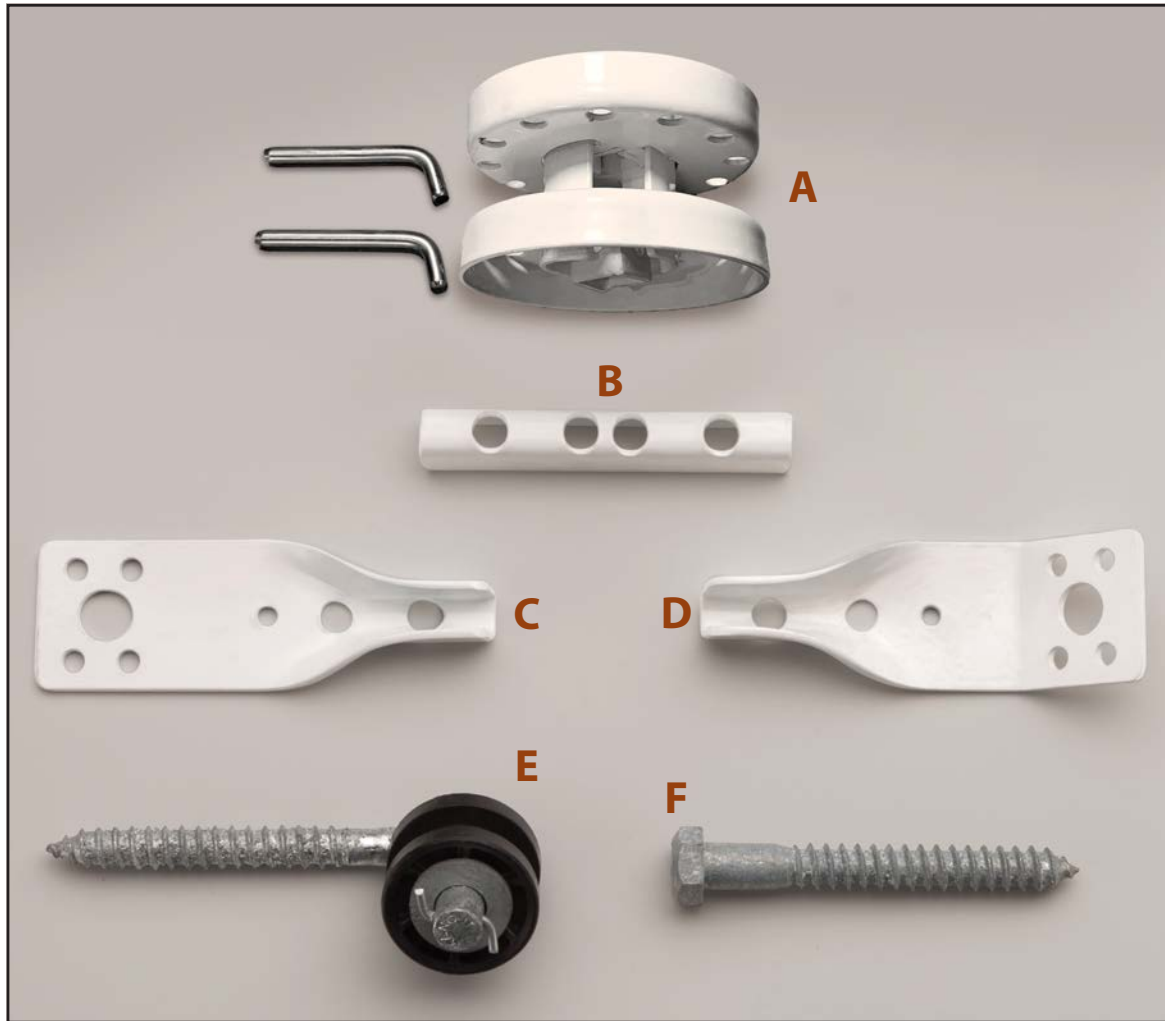

PRODUCT NAME JWJ CODE

A. Mini Spooler Tensioner* JWSP-2MS

The quickest tighteners available - no stripping or crimping needed.
This no saw tooth design is safer for horses and riders.
Comes with 2 Stainless Steel Locking Pins.

B. Joining Buckle* JWCWJB

A quick, secure method to join coated wires without stripping or crimping.




C. Straight Attaching Buckle* JWHCAB

Use for straight pull, or on square posts or buildings.

D. Pre-Bent 45° Attaching Buckle* JWHCAB-45

Assists in alignment with line posts and reduces possible post rotation.
45° PROVIDES CORRECT MOUNTING POSITION (for use on end and gate posts).

Attaching Options for Non-Insulated Buckles (C) and (D)

			1. Lag Screw and Washer
1	2	3	2. Four - Wide Shoulder Hex Head Drive Screws
			3. Two - 2" (50mm) barbed staples


E. Inside Corner Insulator with Hex Head . . . JWICR**

Made of heavy duty materials for a long lasting, professional installed look!
For up to 90° on an inside corner.
SIZE: ½" x 4" (10mm x 109mm)


F. Lag Screw LAG-4**

SIZE: .5" x 4" (12mm x 100mm)

* Horsecote® Hardware is Double Coated for Superior Weather Resistance: E-Coat and Powder Coat

Available in Brown, Black and White 

** Hot Dipped Galvanized

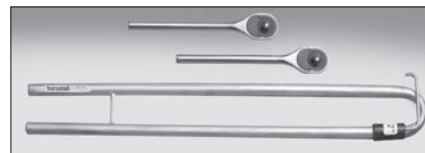

Extended Handle Ratchets

Use 2" (51mm) size for Mini Spooler Tensioners • Includes safety pin



horserail.com

Copyright © 2021 John Wall, Inc. All Rights Reserved.
Horserail®, Hottop®, Hottop Plus®, Horsecote®, Hotcote®, and Safe-T-Brace Cable® are registered U.S. trademarks of John Wall, Inc.
Please visit horserail.com for a complete list of trademark and patent information.